

Shear lock 1200KG=2600Lbs



SL-1200


Introduction

1. Waterproof for outdoor installation
2. Beautiful and elegant embedded installation
3. Long service life and not easy to age
4. Magnetic suction + latch dual structure
5. 0/3/6/9 four-speed delay adjustable
6. Lock signal NONC feedback
7. Maximum load capacity 1200KG


Specifications

Locking delay	0/3/6/9S four-speed adjustable
Ambient temperature	-30°C~65°C
Working current	DC12V starting current 1.6A holding current 0.22A DC24V starting current 1A, holding current 0.13A
Door lock signal	Lock NONC signal output
Adsorption spacing	<=4mm[matching gasket]
Bearing force	<=1200KG
Working voltage	DC12V~24V

Dimensions

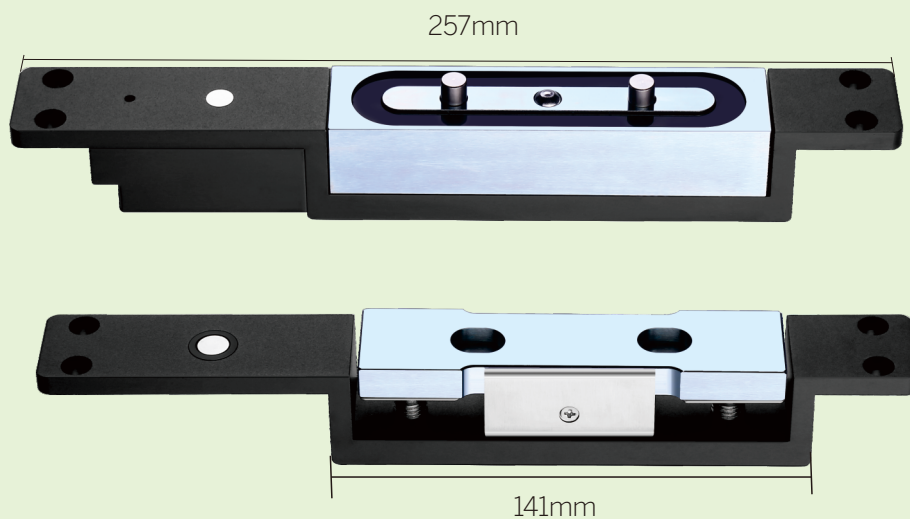

Wiring diagram

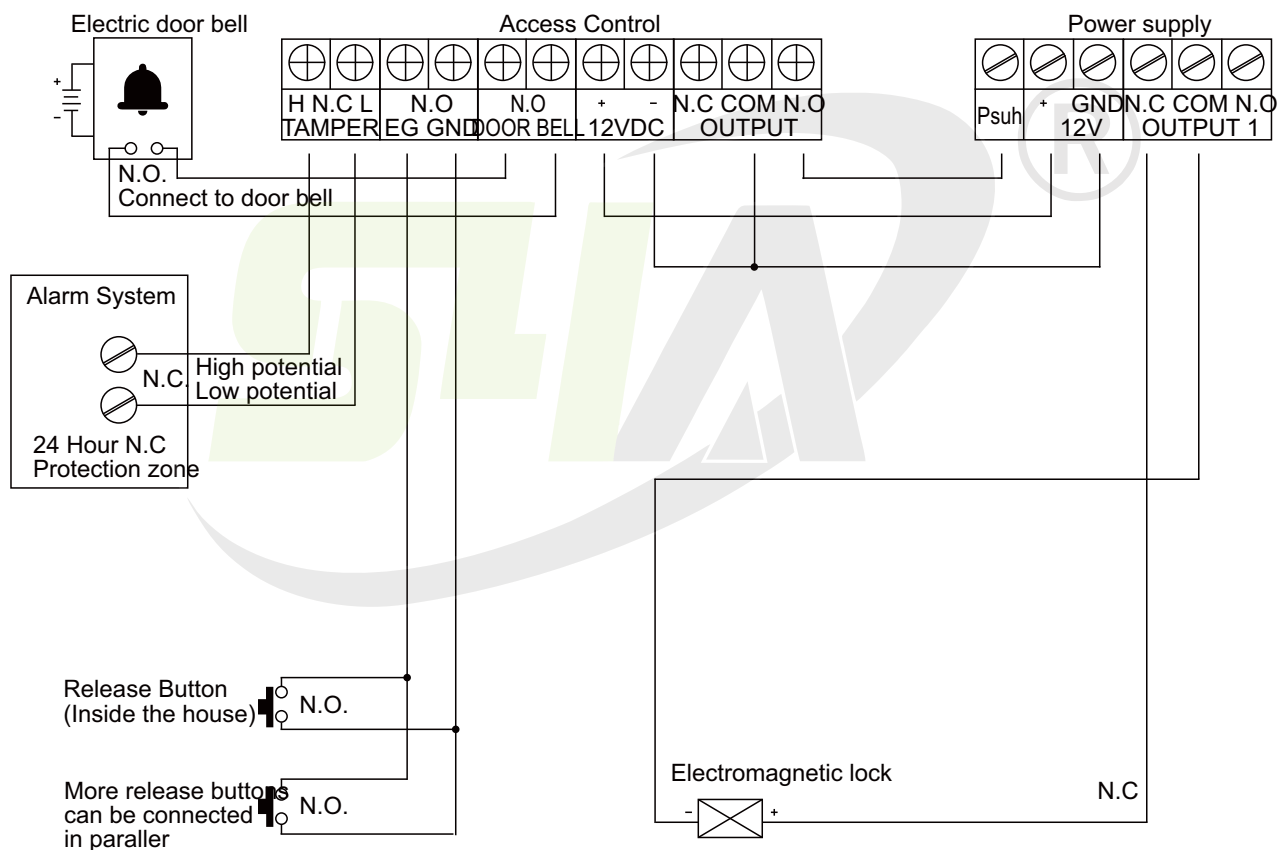

S4A Industrial Co., Limited

Address: #601, floor 6, building 1, JINFANGHUA industrial zone,
Bantian St. Longgang Dist. Shenzhen, PRC.



Tel: +86 755 29450011

www.s4a-access.com