





Gl


WiFi Access Control Module Support APP/2G/3G/4G to Unlock

This module is powered by DC 5V, and can be powered by a mobile phone 5V charger USB cable. Equipped with an additional RF receiver module on the remote control circuit board. When there is no network, the remote control can directly control the switch, and the remote control distance is 20-100 meters.

Specifications

Voltage	DC 5~24V	Electric shock withstand voltage	1000V
Power consumption	<1W	Relay maximum pull-in time	15mS
Quiescent Current	0.08A	Maximum release time of relay	15mS
Working current	0.15A	Operating temperature	-40 °C ~70 °C
Relay	10A	Working humidity	40%~80%RH
Relay life	1,000,000 times or more	Installation Environment	With WiFi
Electrical insulation resistance	100M	Dimension	64x40x18mm

Wiring Diagram

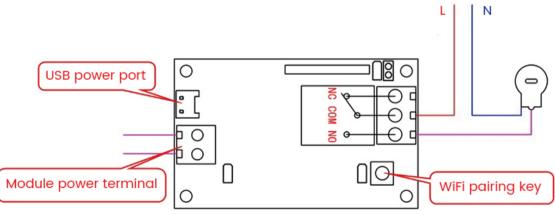



S4A Industrial Co.,Limited

Address: The 2nd floor, Jinmin'an Industrial Zone, #529, Bulong Rd. Bantian St. Longgang Dist. Shenzhen, PRC.. CN 518131

